

PUBLIC ADDRESS / AMPLIFIERS / MONO

PROX-60

PA SINGLE ZONE AMPLIFIER



RADIO



USB

- ✓ Excellent sound quality
- ✓ Modern and discreet design
- ✓ USB/FM player
- ✓ Compact size, for desktop use
- ✓ Secure, easy-to-connect euroblock connectors



+ Info:
<https://fonestar.com/PROX-60>

ESPECIALLY RECOMMENDED IN:



Factories



Sports facilities



Education



All sectors

DESCRIPTION

60 W RMS single zone amplifier. USB/FM player.

TECHNICAL CHARACTERISTICS

FEATURES	Public address amplifier. USB/FM player. Microphone input with mix, gain and priority level control. Tone controls. 100 V and 4 Ohm outputs.
POWER	60 W RMS
RESPONSE	20-20,000 Hz ± 3 dB
DISTORTION	Harmonic: < 1% at 1 kHz
INPUTS	1 x balanced/unbalanced mic, euroblock/jack 6.3 mm, 600 Ohm 6 mV RMS 1 x balanced microphone, euroblock, 600 Ohm 6 mV RMS 2 x auxiliary, euroblock/2 x RCA, 47.000 Ohm 300 mV RMS 1 x 100 V line, euroblock 1 x mute (Emergency Priority) by general purpose NO/NC contacts. Euroblock connector
FUNCTIONS	Priority of inputs (in order of attenuation): · Emergency Input 100V. · Mute by general purpose NO/NC contacts. · Microphone 1 with selectable signal level (VOX) · Microphone 2 with selectable signal level (VOX) · Auxiliary Inputs Player. Indicator lights for power, protection, signal peak, and output signal Fanless induction cooling.
CONTROLS	Microphone volume. Selected input volume Input selector USB/FM player controls Tone: Bass and treble Microphone gain and priority



+ Info:


<https://fonestar.com/PROX-60>

PLAYER	USB player with background music playback mode. When switched on, playback starts automatically FM digital tuner with presets and automatic scanning Memory of last mode selected (USB or FM), last song played or last station tuned. Starts playback in successive order
IMPEDANCE	4 Ohm and 100 V line, euroblock
POWER SUPPLY	230/115 V AC, 200 W
DIMENSIONS	286 x 84 x 225 mm depth
WEIGHT	4.4 kg
ACCESSORIES	FM antenna




+ Info:
<https://fonestar.com/PROX-60>


Frequency response

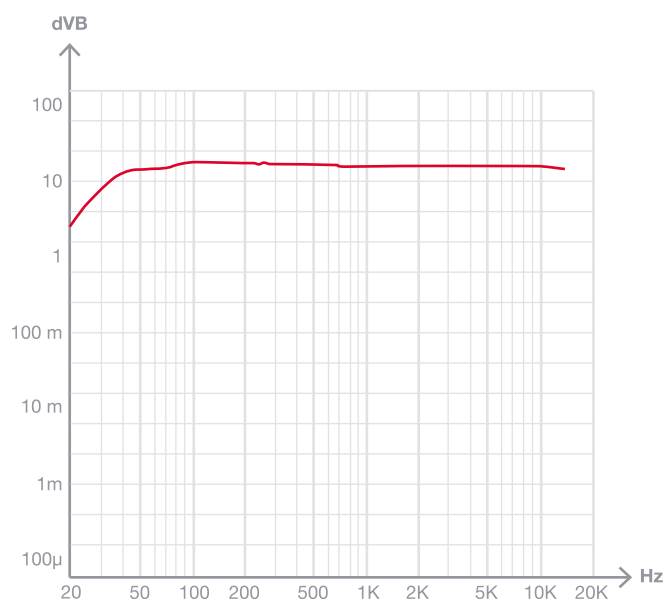

Block diagram

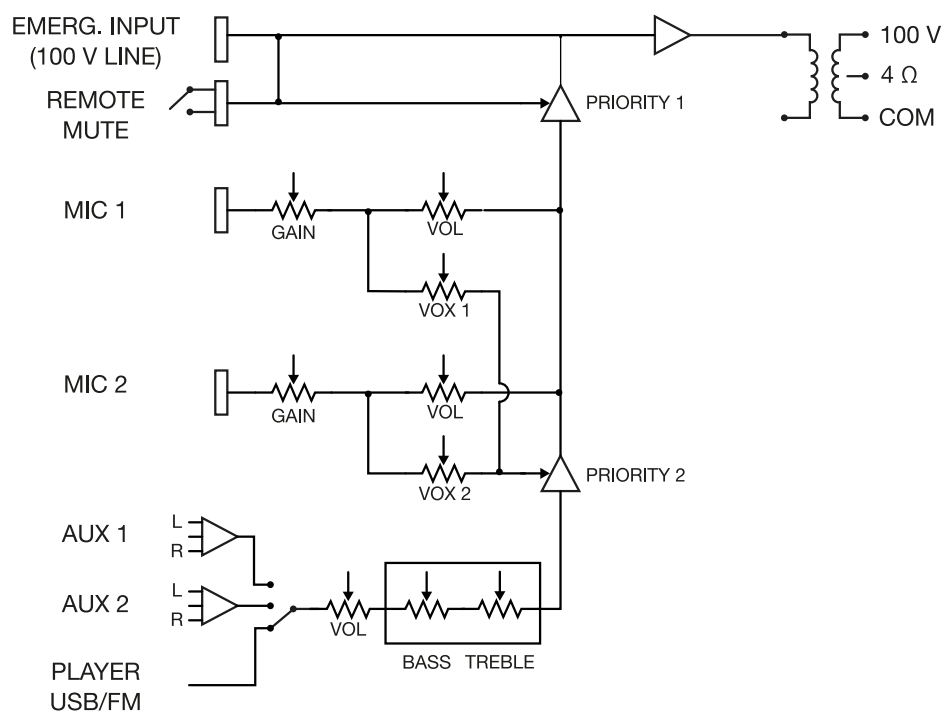

+ Info
<https://fonestar.com/PROX-60>

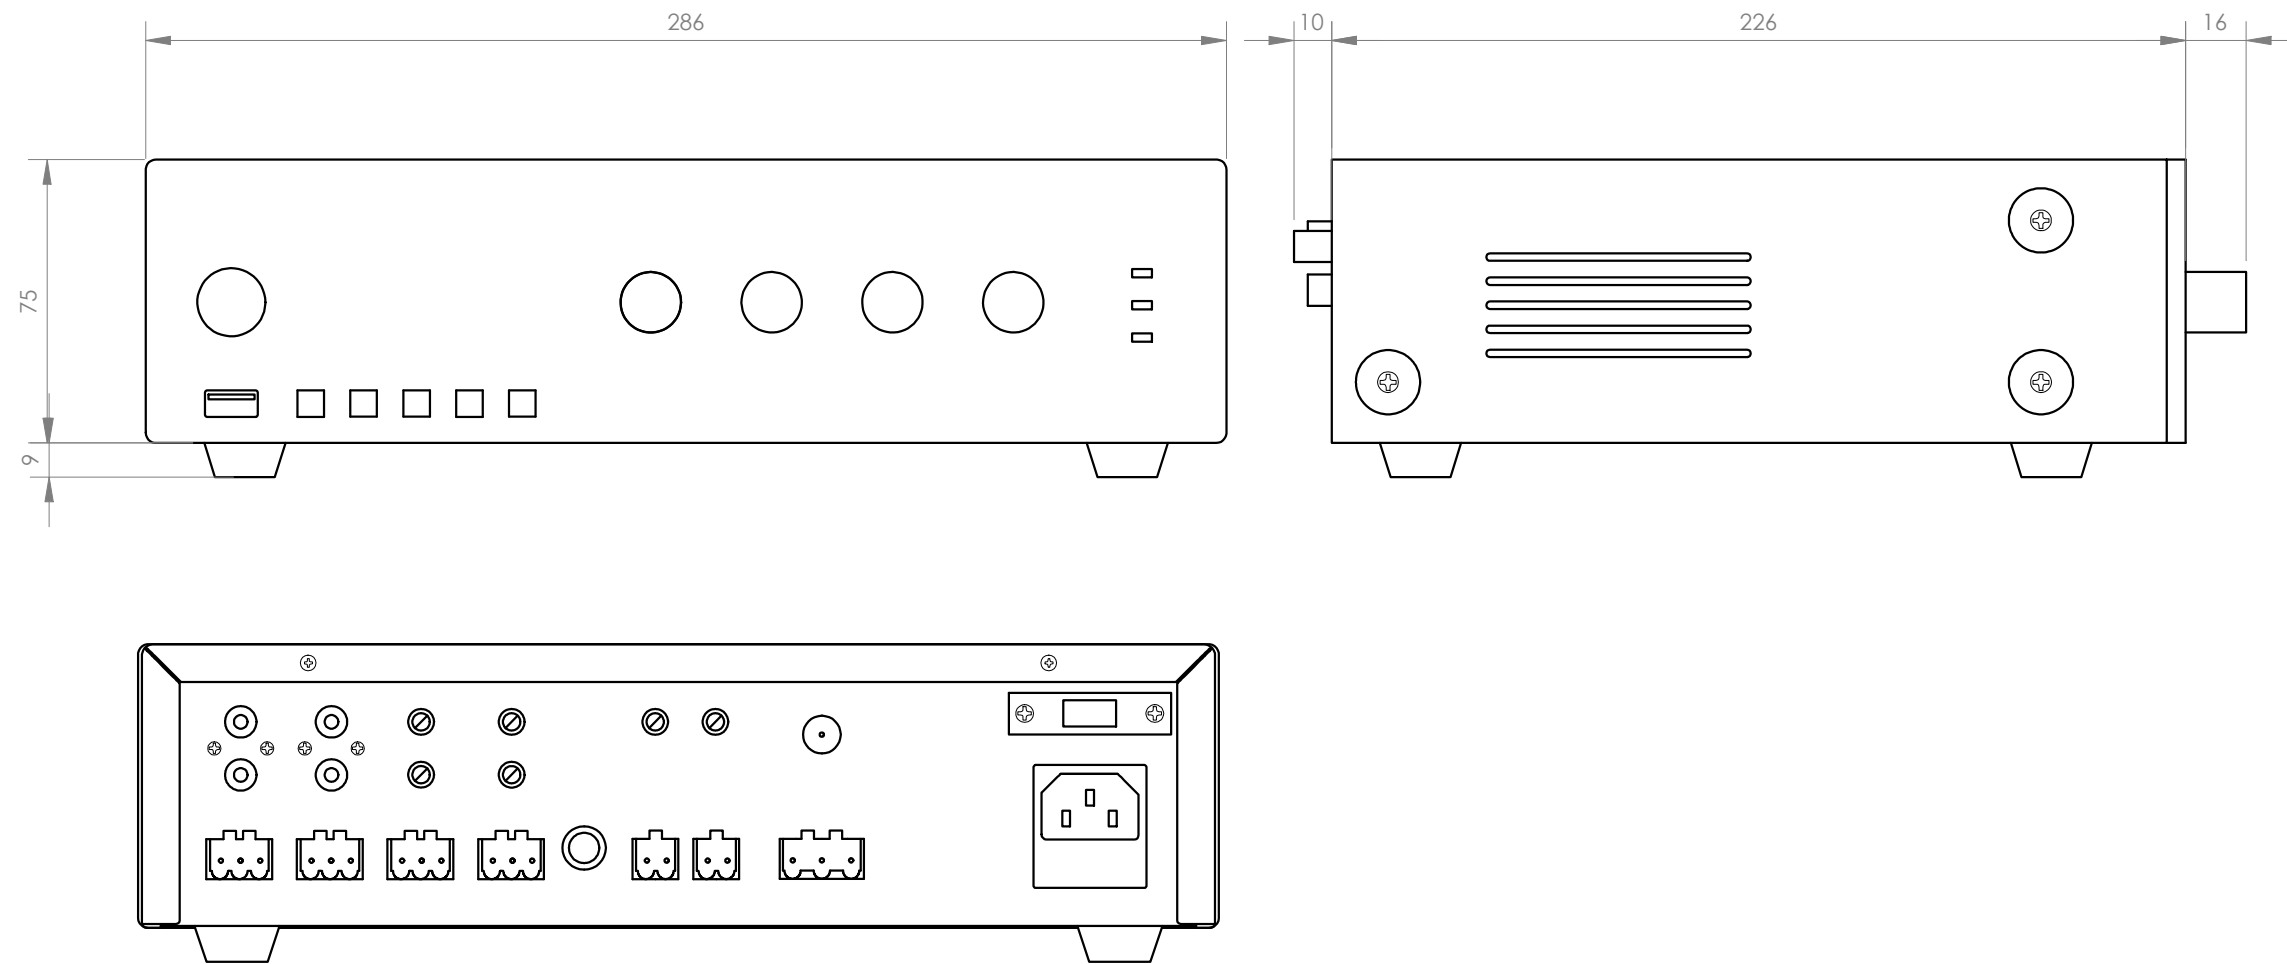

FONESTAR	Model	Description	Units	Scale
	PROX-60	PA SINGLE ZONE AMPLIFIER	mm	1:2