

SYSTEMS AND CONTROL / ZONE SYSTEMS / DIGITAL

MIC-DANTE

DANTE DESKTOP MICROPHONE



- ✓ Crystal clear voice pick-up
- ✓ Configurable talk button ON-OFF/PTT/PTM
- ✓ Digital audio transmission via DANTE



+ Info:
<https://fonestar.com/MIC-DANTE>

ESPECIALLY RECOMMENDED IN:



Sports facilities



Hotels



All sectors

DESCRIPTION

DANTE digital audio desktop microphone

TECHNICAL CHARACTERISTICS

CAPSULE	Unidirectional cardioid electret condenser (without preamplifier circuit)
RESPONSE	80-16,000 Hz
SENSITIVITY	-35 dB (V/Pa) at 1 KHz
IMPEDANCE	600 Ohm
SPL MAX	115 dB
EQUIVALENT NOISE	33 dB
DYNAMIC RANGE	82 dB
DISTORTION (THD)	<1 %
SNR	61 dB
CLIPPING LEVEL	- 6 dBV
SWITCH	Mic: 3 positions ON-OFF/PTT/PTM
INDICATORS	LED power indicator LED operation ring
CONNECTORS	Input: 1 x unbalanced microphone, XLR 600 Ohm. Output: 1 x LAN port (DANTE) for connection to local area network, RJ-45
TEMPERATURE	Operating temperature: -20 °C - 50 °C Storage temperature: -25 °C - 70 °C Relative humidity: 0 - 90 %
POWER SUPPLY	POE (IEE 802.3 af standard) XLR 1.5 to 9 V DC
DIMENSIONS	Gooseneck microphone: 45 mm high Base: 93 x 46 x 122 mm depth
WEIGHT	0.6 kg
ACCESSORIES	Wind-shield foam




+ Info:

<https://fonestar.com/MIC-DANTE>

MIC-DANTE

MICRÓFONO DE SOBREMESA DANTE

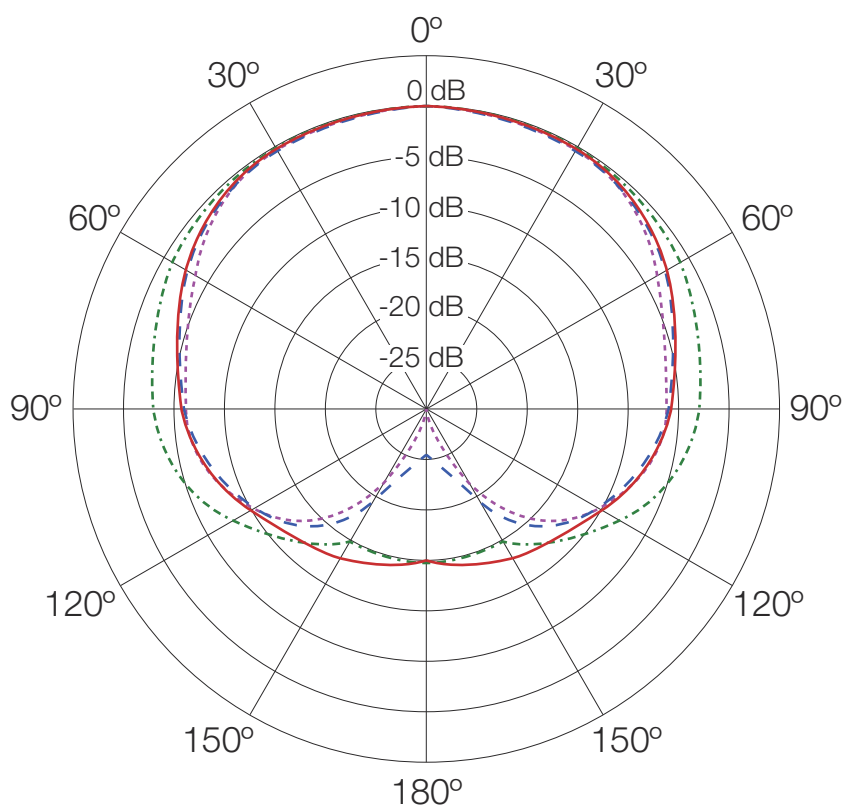

- - - - - 4000 Hz
 - - - - - 2000 Hz
 ————— 1000 Hz
 - - - - - 500 Hz

Ángulo de cobertura -6 dB:

500 Hz	210°
1000 Hz	180°
2000 Hz	180°
4000 Hz	160°



+ Info:
<https://fonestar.com/MIC-DANTE>