

MICROPHONE / DESKTOP MICROPHONE / CONDENSER

MICSET-C32

CARDIOID UNIDIRECTIONAL ELECTRET CONDENSER DESKTOP MICROPHONE



32 cm GOOSENECK



XLR BALANCED CABLE


 DIVERSE RANGE
MODULAR DESIGN


HIGH SNR



HIGH SPL



LED INDICATORS


 MULTIPLE OPERATING
MODES: ON/OFF/PTM/PTM

 PHANTOM
9 to 52 V DC

 CONDENSER
UNIDIRECTIONAL
ELECTRET CONDENSER

 WIDE FREQUENCY
RESPONSE

- ✓ Crystal clear voice pick-up
- ✓ 5 m cable with XLR female 3 pin connector to XLR male 3 pin connector
- ✓ Bass-cut filter/ Flat response. Cut-off at 80 Hz



+ Info:

<https://fonestar.com/MICSET-C32>

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

Cardioid unidirectional electret condenser desktop microphone. 55-20,000 Hz. Sensitivity -32 dB (V/Pa) at 1 kHz. 3-pin male XLR connection.

TECHNICAL CHARACTERISTICS

CAPSULE	Unidirectional cardioid electret condenser
RESPONSE	55-20,000 Hz
SENSITIVITY	-32 dB $\pm$ 3 dB (V/Pa) at 1 kHz
IMPEDANCE	675 Ohm
SPL MAX	128 dB
EQUIVALENT NOISE	34 dB
DYNAMIC RANGE	94 dB
DISTORTION (THD)	<1 %
SNR	60 dB
CLIPPING LEVEL	- 6 dBV
SWITCH	Mic: 3 positions ON-OFF/PTT/PTM Filter: Low cut/ Flat response - Cut-off at 80 Hz
POWER SUPPLY	9 to 52 V DC phantom
INDICATORS	LED power indicator
TEMPERATURE	Operating temperature: -20 °C - 50 °C Storage temperature: -25 °C - 70 °C Relative humidity: 0 - 90 %
CONNECTORS	Output: XLR male 3 pin, line balanced
DIMENSIONS	Gooseneck: 32 cm height Desktop base: 93 x 46 x 122 mm depth
WEIGHT	0.6 kg
ACCESSORIES	Windshield foam 5 m cable with 3-pin XLR female connector to 3-pin XLR male connector




+ Info:

<https://fonestar.com/MICSET-C32>

Output Response(Test Mic) - Input1

● 1kHz

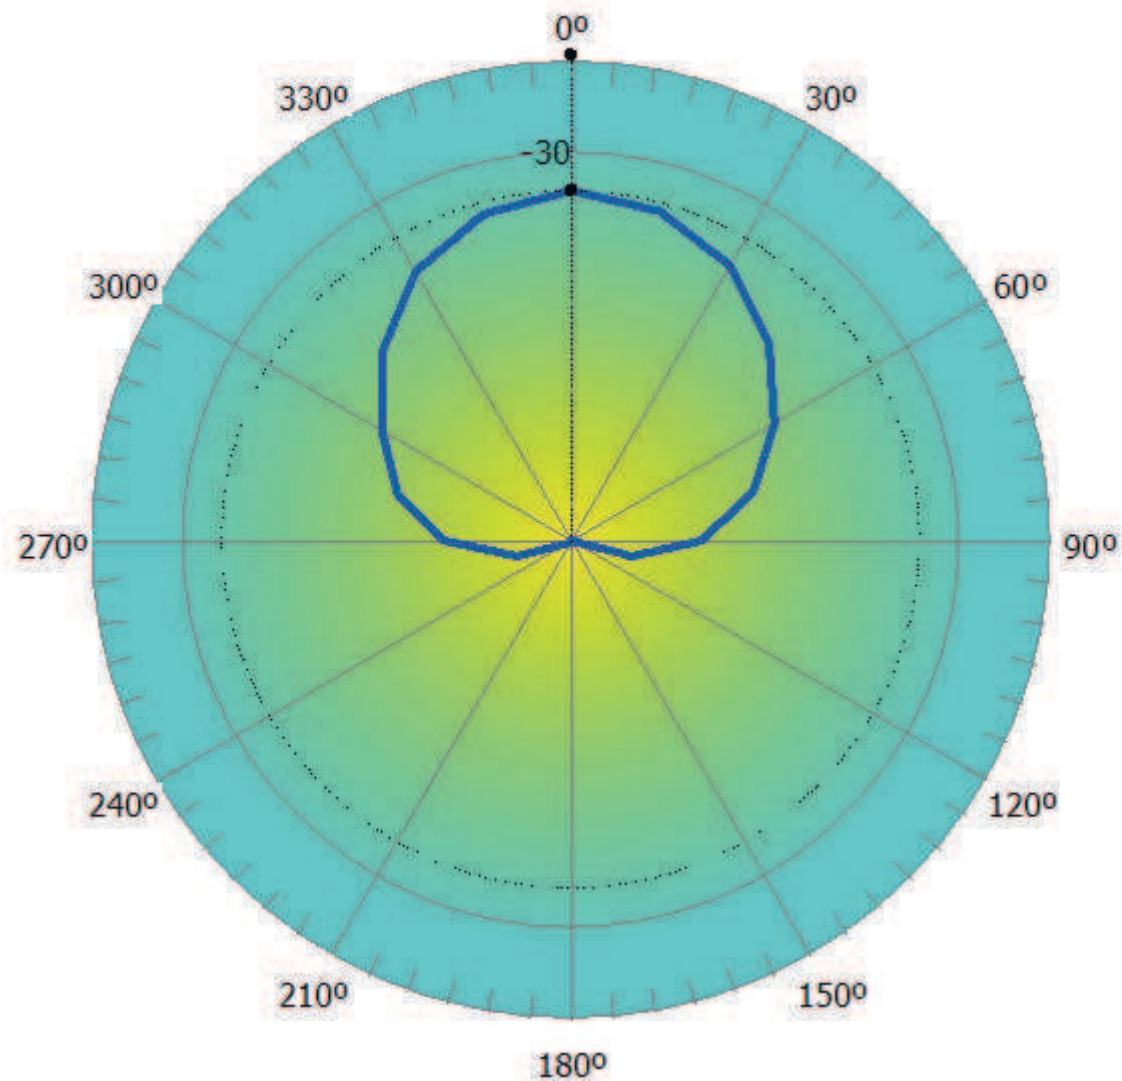

Cursor values

Frequency : 1kHz

Magnitude : -32.032 dB/1 V

Angle : 0 Deg.

Product:
MICSET-C32 + MICSET-C32LED + MICSET-C45
Polar Diagram

Date: 2025-01-09

FONESTAR

www.fonestar.es