

MICROPHONE / DESKTOP MICROPHONE / DYNAMIC

MICSET-D32XLR

CARDIOID UNIDIRECTIONAL DESKTOP DYNAMIC MICROPHONE



XLR BALANCED CABLE



32 cm GOOSENECK



DIVERSE RANGE, MODULAR DESIGN



HIGH SNR



HIGH SPL



LED INDICATORS



MULTIPLE OPERATING MODES: ON/OFF/PTT



DYNAMIC UNIDIRECTIONAL DYNAMIC



WIDE FREQUENCY RESPONSE

- ✓ Crystal clear voice pick-up
- ✓ 5 m cable with XLR male 3 pin connector
- ✓ Great max. SPL



+ Info:

<https://fonestar.com/MICSET-D32XLR>

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

Cardioid unidirectional desktop dynamic microphone. 100-15.000 Hz. Sensitivity -55 dB (V/Pa) at 1 kHz. 3-pin male XLR connection.

TECHNICAL CHARACTERISTICS


CAPSULE	Unidirectional cardioid dynamics
RESPONSE	100-15,000 Hz
SENSITIVITY	-55 dB $\pm$ 3 dB (V/Pa) at 1 kHz
IMPEDANCE	600 Ohm
SPL MAX	110 dB
EQUIVALENT NOISE	32 dB
DYNAMIC RANGE	78 dB
DISTORTION (THD)	<1 %
SNR	75 dB
PUSH BUTTON	ON-OFF/PTT
TEMPERATURE	Operating temperature: -20 °C - 50 °C Storage temperature: -25 °C - 70 °C Relative humidity: 0 - 90 %
CONNECTORS	XLR male 3 pin
DIMENSIONS	Gooseneck: 32 cm high Desktop base: 93 x 46 x 122 mm depth
CABLE	5 m with 3-pin XLR male connector Balanced line
WEIGHT	0.76 kg



+ Info:

<https://fonestar.com/MICSET-D32XLR>

1kHz

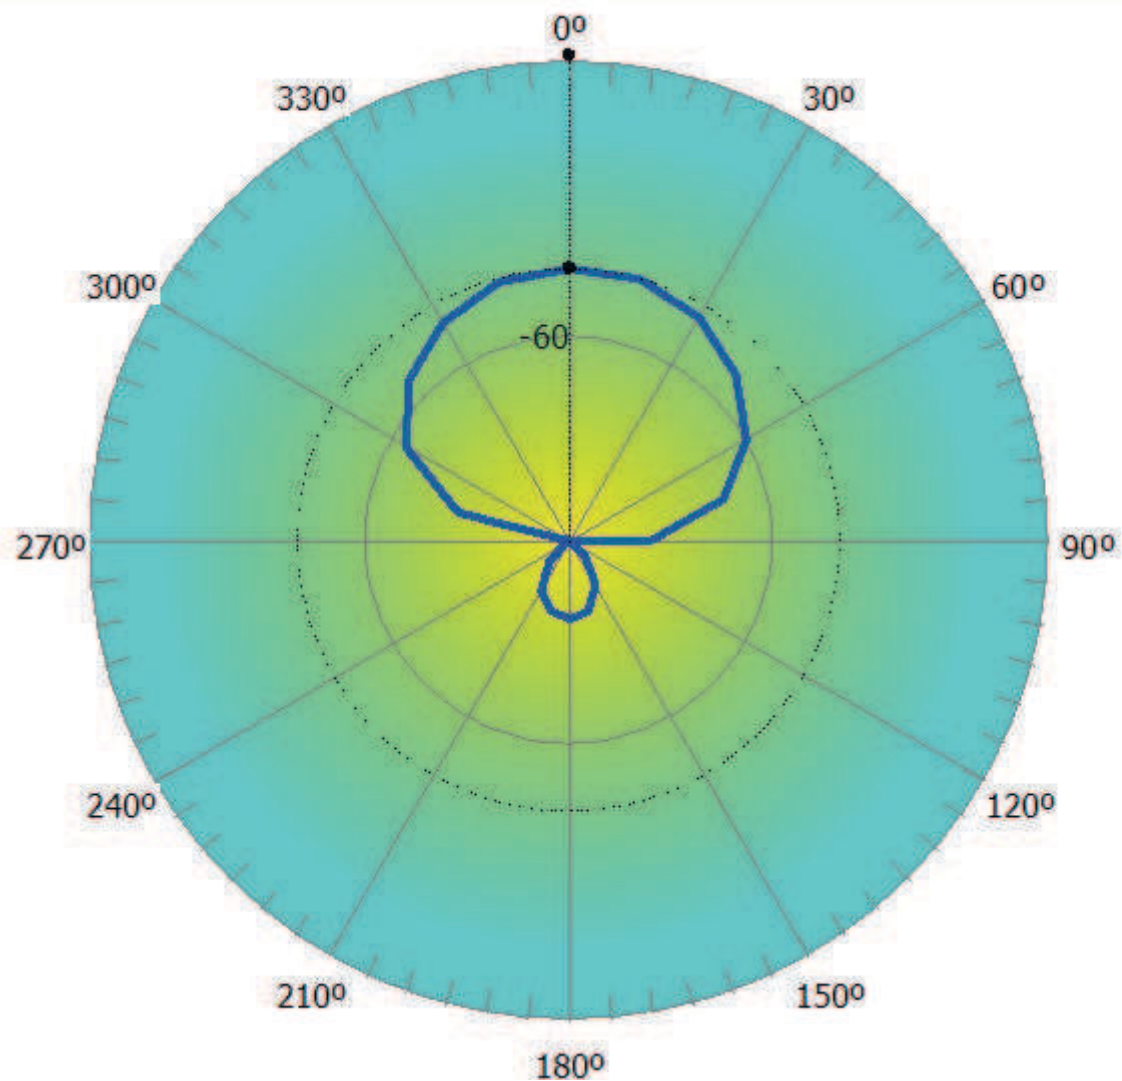

Frequency : 1kHz
Magnitude : -55.042 dB/1 V
Angle : 0 Deg.

Product:
MICSET-D32XLR + MICSET-D32J + MICSET-D32JSE
Polar Diagram

Date: 2025-01-09

FONESTAR
www.fonestar.es