

PUBLIC ADDRESS / AMPLIFIERS / MONO

PROX-240S

PA SINGLE ZONE AMPLIFIER



 EMERG / CH1-4
PRIORITY INPUT
  240 W RMS@84 Ω
240 W RMS@100 V

- ✓ PA versatile amplifier
- ✓ Microphone inputs with mix, gain and priority level control
- ✓ Great performance, low maintenance



+ Info:
<https://fonestar.com/PROX-240S>

ESPECIALLY RECOMMENDED IN:



Factories



Sports facilities



Education



All sectors

DESCRIPTION

240 W RMS single zone amplifier.

TECHNICAL CHARACTERISTICS

FEATURES	Public address amplifier. Microphone input with mix, gain and priority level control. Tone controls. 100 V and 4 Ohm outputs.
POWER	240 W RMS
RESPONSE	40-20,000 Hz (-10 dB)
DISTORTION	THD+N: < 1% @ 1 kHz
S/N RATIO	>77 dB
PROTECTIONS	Overcurrent, DC and short-circuit at the output
INPUTS	CH 1 balanced mic/line with 48V Phantom, Combo (XLR + 6.3 mm) and euroblock. CH 2, 3 and 4 balanced mic/line with 48V Phantom. Euroblock connector Mic signal level: 6 mV RMS (-44 dBV) / 600 Ohm Line signal level: 250 mV RMS (-12 dBV) / 100k Ohm 2 x AUX. 2 x RCA and euroblock connector. Signal level 300 mV RMS (-10 dBV) / 47,000 Ohm 1 x emergency. Euroblock connector. Speaker line signal level 100 V 1 x mute (Emergency Priority) by general purpose NO/NC contacts. Euroblock connector
OUTPUTS	1 x line. 2 x RCA connector. Signal level 1.25 mV RMS (+2 dBV) 100 V or 4 Ohm speaker output. Connector screw terminals
IMPEDANCE	4 Ohm and 100 V (42 Ohm) line
FUNCTIONS	Priority of inputs (in order of attenuation): · Emergency Input 100V. · Mute by general purpose NO/NC contacts. · Channel 1 with shared selectable signal level CH 1-2-3-4 (VOX) · Channels 2 3 4 with shared selectable signal level CH 1-2-3-4 (VOX) · Auxiliary Inputs Indicator lights for power, protection, signal peak, and output signal Temperature-controlled forced ventilation cooling



+ Info:


<https://fonestar.com/PROX-240S>

CONTROLS	Microphone volume Mic/line/phantom switch Master volume Aux input selector Tone: bass and treble (± 10 dB 100 Hz and 10k Hz). Microphone gain Priority activation signal level (VOX)
TEMPERATURE	Operation: 0° ~ 40°C
MAXIMUM HUMIDITY	95%
POWER SUPPLY	230/115 V AC, 50-60 Hz, 480 W Fuse AC 230 V 4 A / 115 V 8 A
DIMENSIONS	433 x 89 x 360 mm depth. 2 U 19" rack
WEIGHT	11.4 kg
ACCESSORIES	Power cable Rack mounts




+ Info:
<https://fonestar.com/PROX-240S>

Frequency response

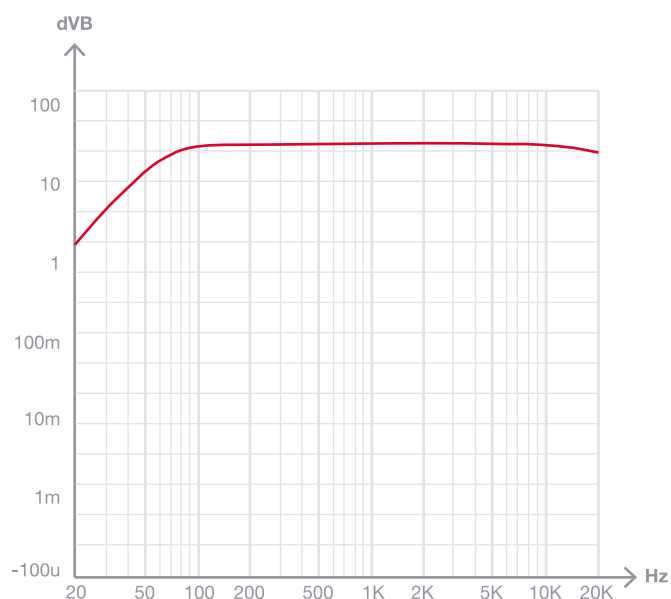

Block diagram

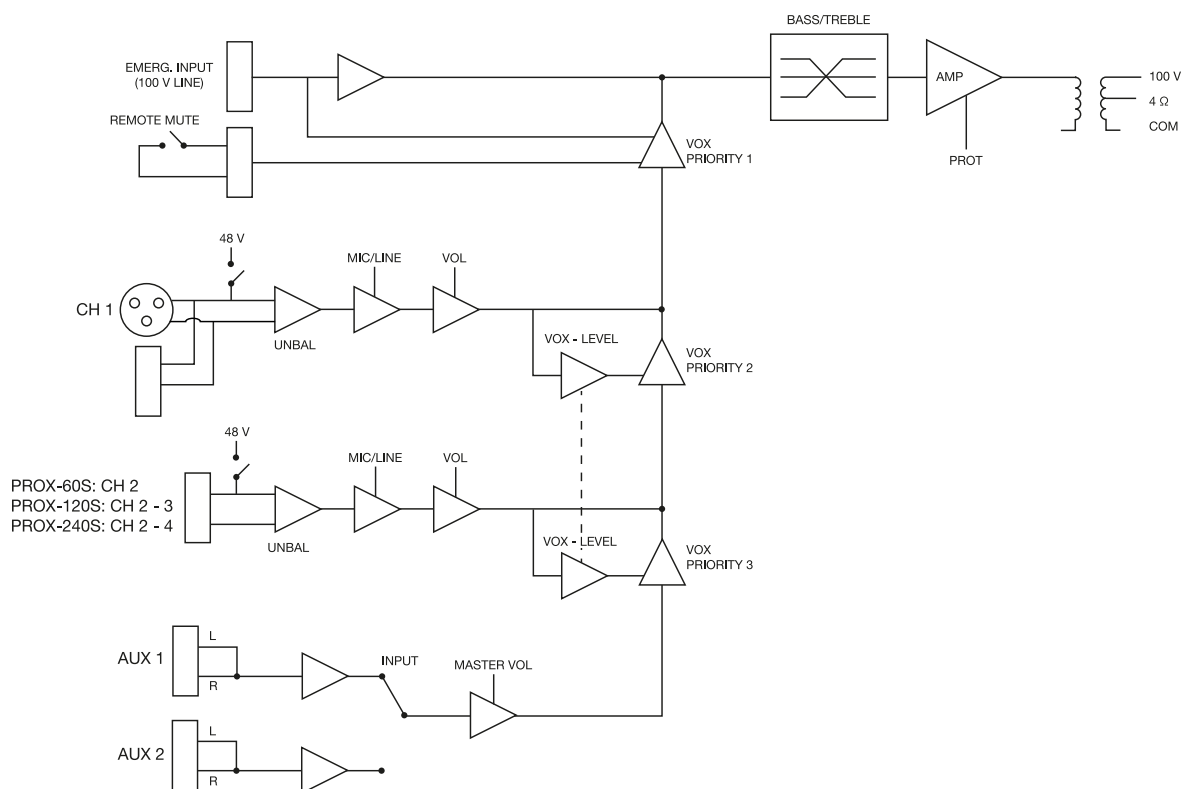

+ Info

<https://fonestar.com/PROX-240S>

