MICROPHONE / CONFERENCE SYSTEMS / WIRELESS

SCI-770D

DELEGATE MICROPHONE FOR WIRELESS CONFERENCE SYSTEM





- Crystal clear voice pick-up
- Information display
- Automatic channel selection
- Reach up to 60 m under favourable conditions

+ Info:
https://fonestar.com/SCI-770D

ESPECIALLY RECOMMENDED IN:



Education



Offices

DESCRIPTION

Delegate microphone for wireless conference system mod. SCI-750

TECHNICAL CHARACTERISTICS

FEATURES	Delegate wireless microphone. Information display. Gooseneck microphone. Automatic channel selection. Data and audio transmission. Carrier frequency range: 640 - 665.75 MHz. Data control frequency range: 422.4 - 438.4 MHz. Range: 60 m under favourable conditions. Rechargeable battery via charging case.
POWER	10 mW max.
CAPSULE	Unidirectional electret condenser
RESPONSE	50 - 20,000 Hz
SENSITIVITY	-45 dB (V/Pa) at 1 kHz
DYNAMIC RANGE	110 dB
DISTORTION	THD+N: <1%
POWER SUPPLY	Rechargeable battery 3'7 V, 1.850 mAh included or 3 x 1'5 V LR6-AA batteries
DIMENSIONS	Gooseneck microphone: 430 mm Base: 180 x 58 x 120 mm depth
WEIGHT	0.7 kg
INCLUDES	Foam windshield Adapter for operating with LR6-AA batteries
OPTIONAL	SCI-780C: Battery charger case SCI-790C: Battery charger case



+ Info:
https://fonestar.com/SCI-770D

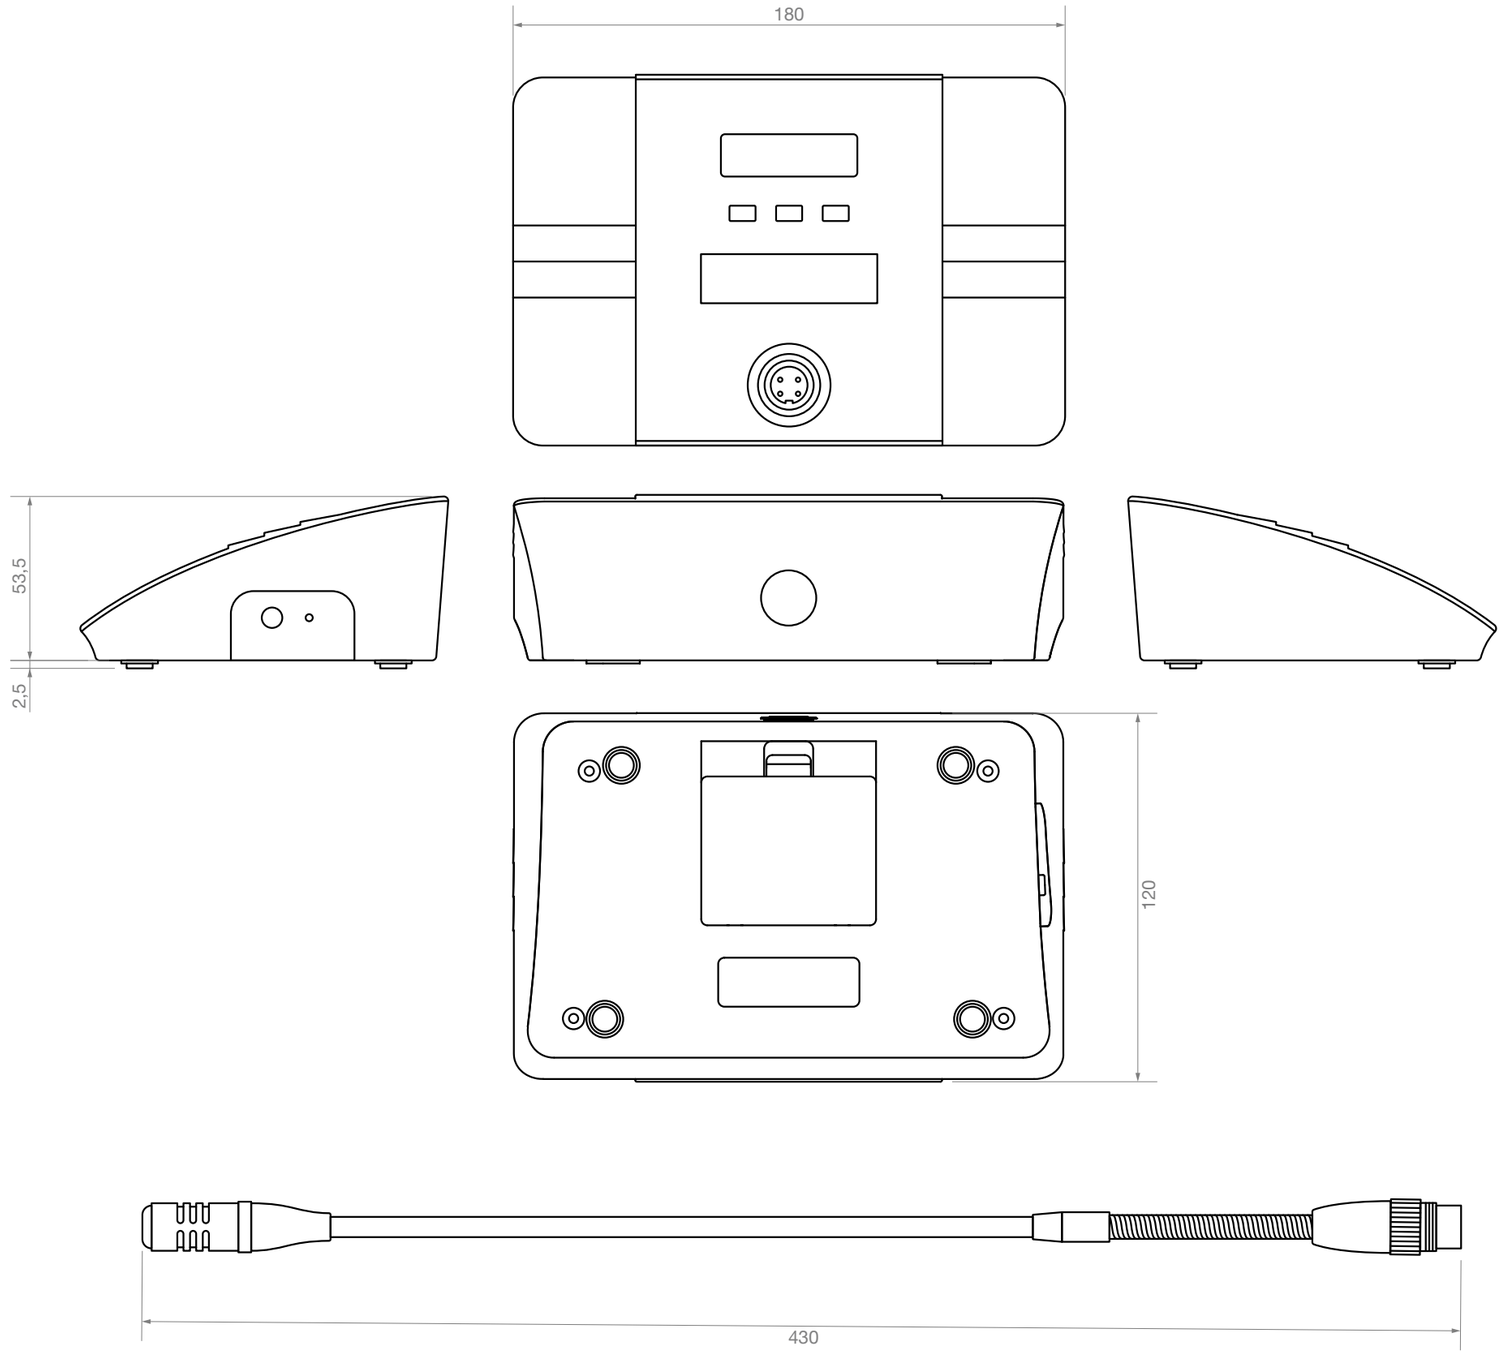

FONESTAR	Model	Description	Units	Scale
	SCI-770D	DELEGATE MICROPHONE FOR WIRELESS CONFERENCE SYSTEM MOD. SCI-750	mm	1:2