

PUBLIC ADDRESS / SPEAKERS / SURFACE

SONORA-5-WH

LOW IMPEDANCE SURFACE SPEAKER



IP66

- ✓ Crisp, distortion-free sound
- ✓ Excellent finish and elegant design
- ✓ IP-66 protection and salt fog
- ✓ Quick and easy installation



+ Info:

<https://fonestar.com/SONORA-5-WH>

ESPECIALLY RECOMMENDED IN:



Hospitality



Education



Hotels



All sectors

DESCRIPTION

5 ¼" surface speaker. 40 W RMS @ 8Ohm. IP66 and salt fog protection. Adjustable mounting bracket. Steel safety cable.

V02: New version, larger box due to pre-assembly of the bracket.

TECHNICAL CHARACTERISTICS

FEATURES	Low-impedance loudspeaker. Prepared for outdoor use, with IP-66 protection.
POWER	80 W maximum, 40 W RMS
SPEAKERS	1 x 5 ¼" polypropylene woofer 1 x 1" tweeter
RESPONSE	80-20,000 Hz
IMPEDANCE	8 Ohm
SENSITIVITY	88,3 dB @ 1 W/1 m
M SOUND PRESSURE	102.2 dB @ max. W/1 m
COVERAGE ANGLE	H/V: 200°/200°@500 Hz, 135°/135°@1 kHz, 100°/120°@2 kHz, 60°/80°@4 kHz (-6 dB)
PROTECTIONS	IP-66 segundo EN 60529 IEC 60068-2-11 Testes ambientais (Névoa salina)
MATERIAL	ABS (UV resistance) Aluminium mesh grille, with powder-coated finish Weather-resistant mount A2 stainless steel screws
CONNECTORS	Euroblock in and out for cable 0.25 - 2.5 mm ² cross section Rubber cable glands for round cables with a diameter of 4-7 mm
TEMPERATURE RANGE	-10°C to 60°C
COLOUR	White (RAL 9003)
DIMENSIONS	Loudspeaker: 162 x 263 x 147 mm depth Mount wall plate: 68 x 110 mm Loudspeaker with mount: 216 mm depth
WEIGHT	1.65 kg



+ Info:

<https://fonestar.com/SONORA-5-WH>

ACCESSORIES


Adjustable fixing mount $\pm 60^\circ$ in all directions
Steel safety cable




+ Info:

<https://fonestar.com/SONORA-5-WH>

Impedance vs Frequency

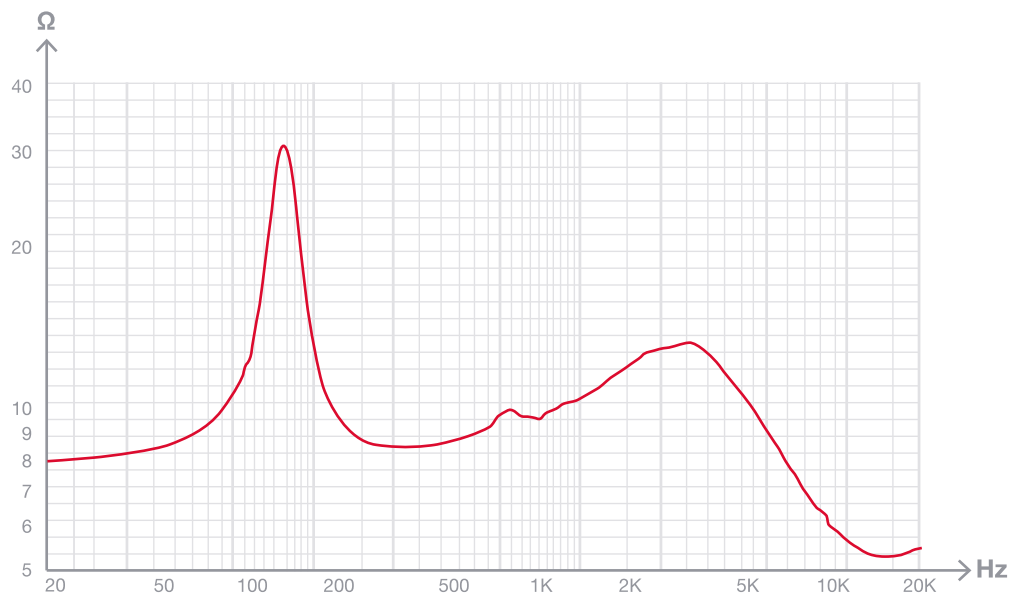


SPL vs Frequency

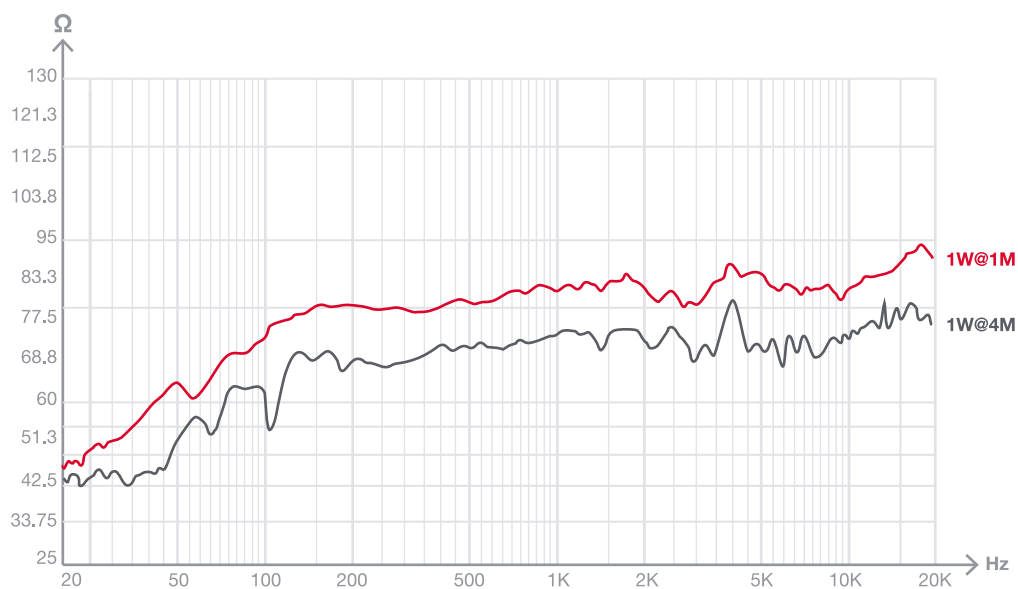

+ Info
<https://fonestar.com/SONORA-5B>

SPL vs Angle

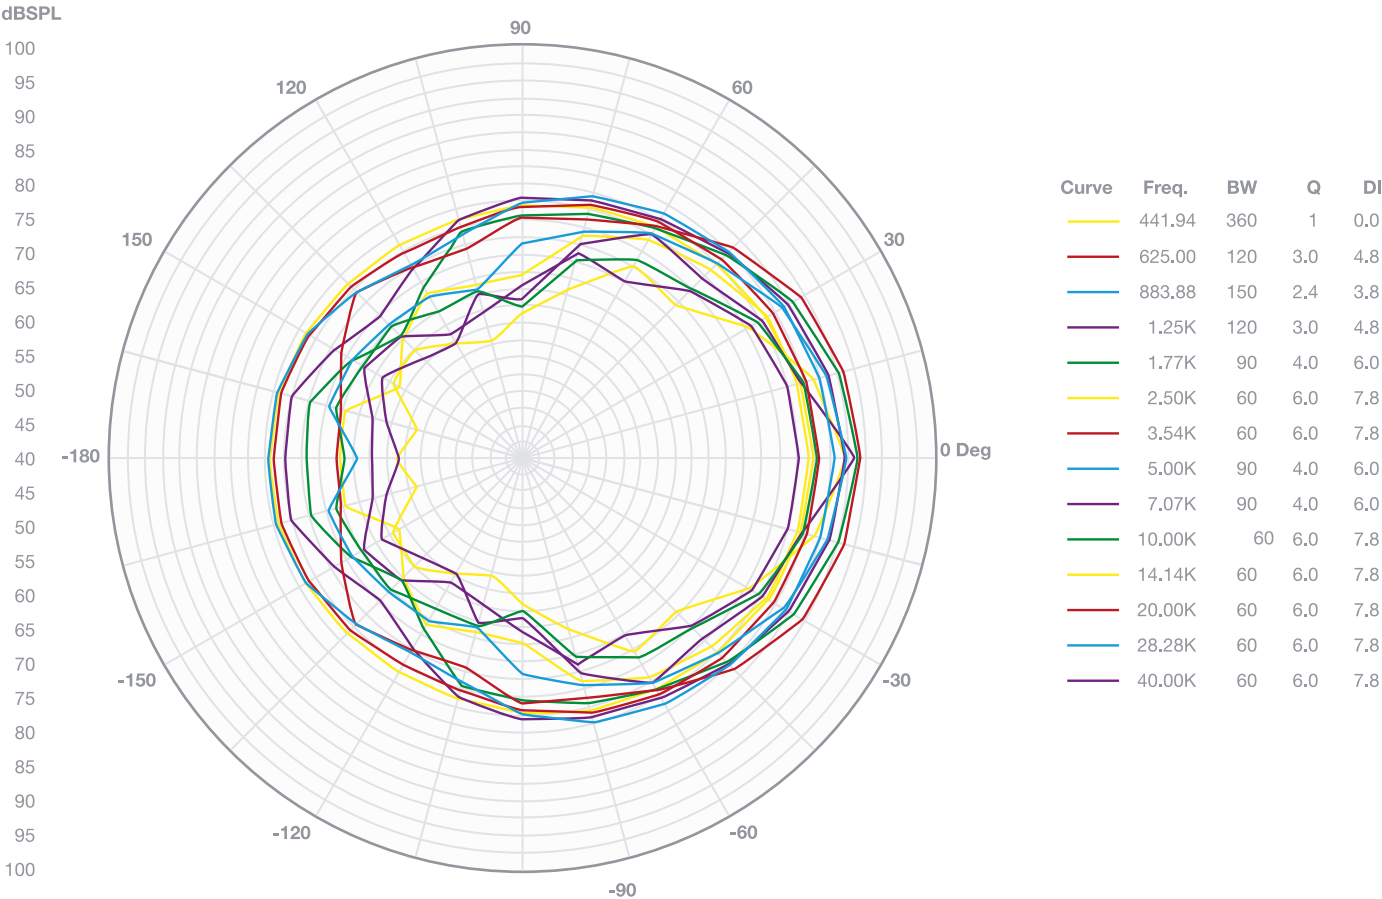

+ Info
<https://fonestar.com/SONORA-5B>

