

PUBLIC ADDRESS / SPEAKERS / SURFACE

TDO-SUB-1

INVISIBLE SUBWOOFER SPEAKER WITH 100 V LINE TRANSFORMER



- ✓ Invisible speaker. Create a musical environment without visual impact
- ✓ Bass boost for better sound quality
- ✓ Non-directional sound, wide coverage



+ Info:

<https://fonestar.com/TDO-SUB-1>

ESPECIALLY RECOMMENDED IN:



Hospitality



Retail



Hotels



All sectors

DESCRIPTION

Invisible Subwoofer Speaker. 50 W RMS@100 V. Installation in plasterboard panels.

TECHNICAL CHARACTERISTICS


FEATURES	Invisible subwoofer loudspeaker with 100 V line transformer. Flush-mounting in plasterboard panels, with accessories for installation on 12.5 mm plates. Great bass response. Non-directional sound. Long service life.
POWER	60 W maximum, 50 W RMS
SPEAKERS	8" extra-flat woofer, paper cone and rubber suspension (8 Ohm)
RESPONSE	45-170 Hz @ -10 dB
IMPEDANCE	50 W RMS@100V (200 Ohm)
SENSITIVITY	84 dB @ 1 W/1 m, 100 Hz
MAXIMUM SOUND PRESSURE	100 dB @ max. W/1m
DISPERSION	170°
CROSSOVER	LC low pass filter
MATERIAL	Painted MDF Composite panel
DIMENSIONS	Total speaker: 360 x 525 x 75.5 mm depth Recessed height: 62.5 mm Installation hole: 365 x 530 mm
WEIGHT	7.75 kg
ACCESSORIES	2 longitudinal mounting brackets MDF 100 x 700 x 18 mm depth 8 screws 4.5 x 50 mm



+ Info:

<https://fonestar.com/TDO-SUB-1>

SPL vs Freq

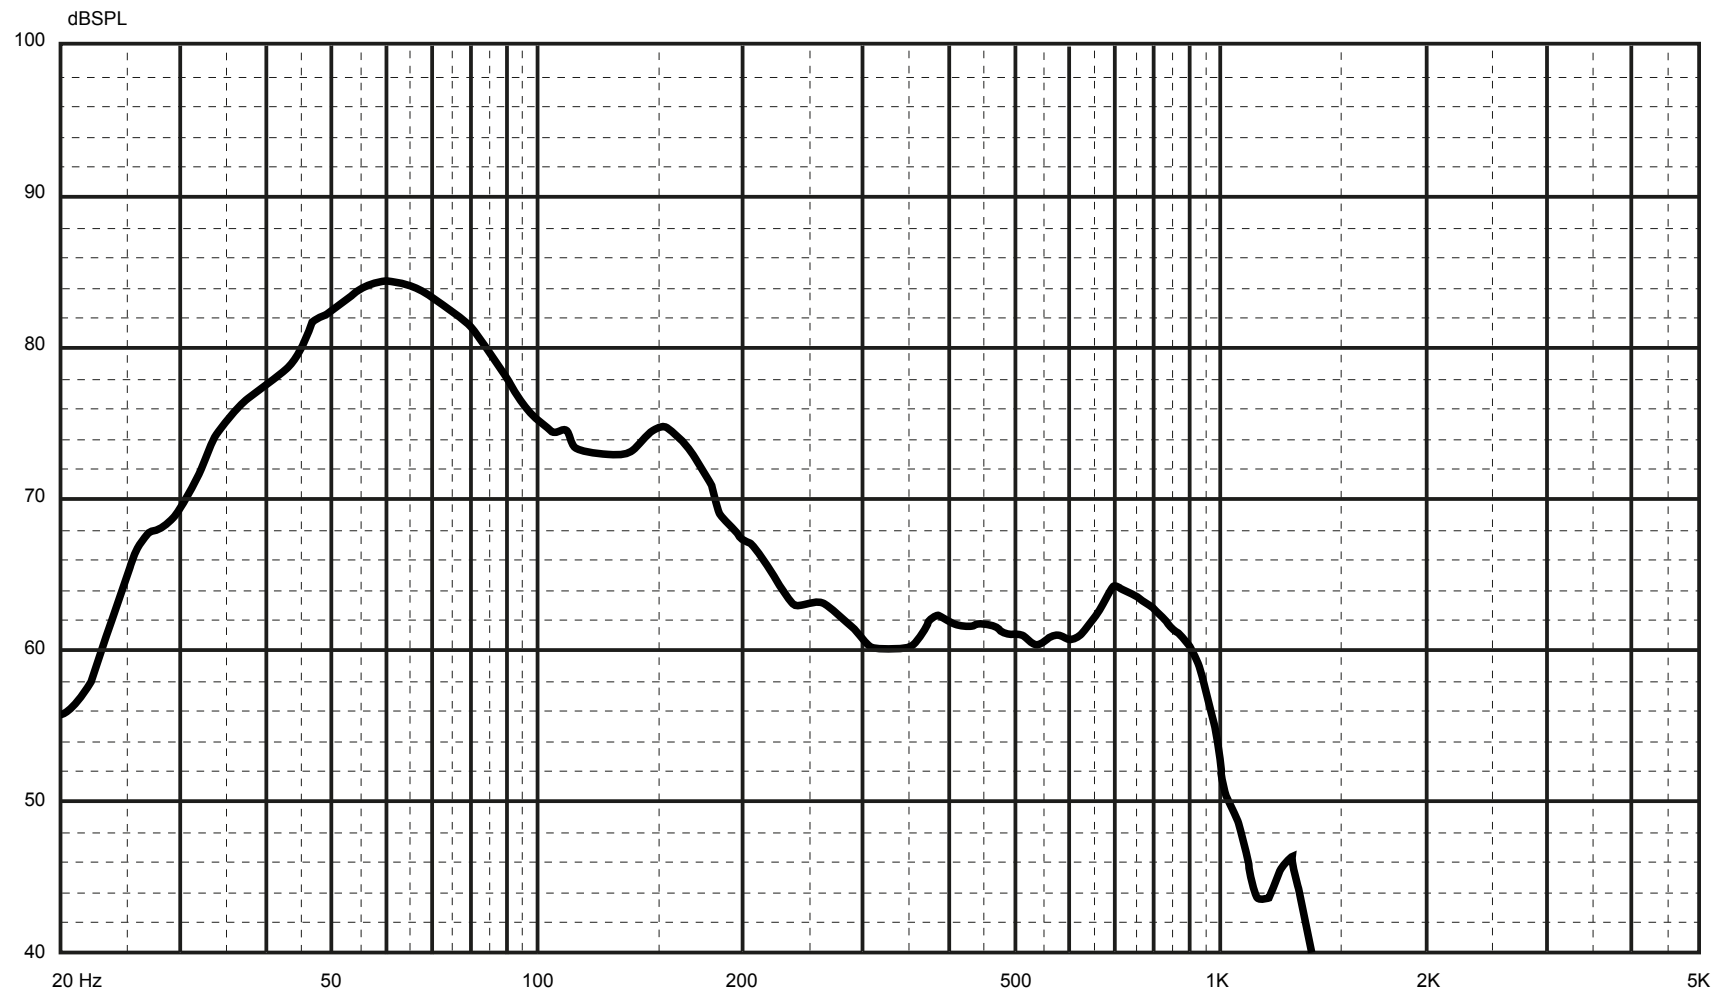

Escala: -;-;-	A4	Proyecto:	FONESTAR Polígono de Trascueto s/n 39600 Revilla de Camargo Tel: +34 942 254 555 Fax: +34 942 262 777 Web: www.fonestar.es
TDO-SUB		Código:	
Autor:		Fecha: 2023-02-23	
Revisado:--		Fecha Revisión: --/--/----	