

PUBLIC ADDRESS / SPEAKERS / SOUND COLUMNS

TOWER-40TB

100 V LINE TRANSFORMER SOUND COLUMN.



- ✓ Optimized for voice
- ✓ Great directivity, avoids coupling and reverberation
- ✓ Concentration of sound in the audience area
- ✓ IP-44 protection



+ Info:

<https://fonestar.com/TOWER-40TB>

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

8 x 2 ½" sound column. 40/20 W RMS@100 V. IP-44 protection. Fixing mounts.


TECHNICAL CHARACTERISTICS

FEATURES	Sound column with line transformer
POWER SUPPLY	60 W maximum, 40 W RMS
SPEAKERS	8 x 2 ½" speakers
RESPONSE	170-15,000 Hz
IMPEDANCE	40 W RMS@100 V (250 Ohm) 20 W RMS@100 V (500 Ohm)
SENSIBILITY	93 dB at 1 W/1 m
DISPERSION	155° H x 110° V (1 kHz) 180° H x 70° V (4 kHz)
PROTECTION	IP-44
MATERIAL	Aluminium enclosure Aluminium mesh
COLOUR	White (RAL 9016)
DIMENSIONS	10.6 x 69.5 x 7.5 cm depth
WEIGHT	3.4 kg
ACCESSORIES	Fixing mounts



+ Info:

<https://fonestar.com/TOWER-40TB>

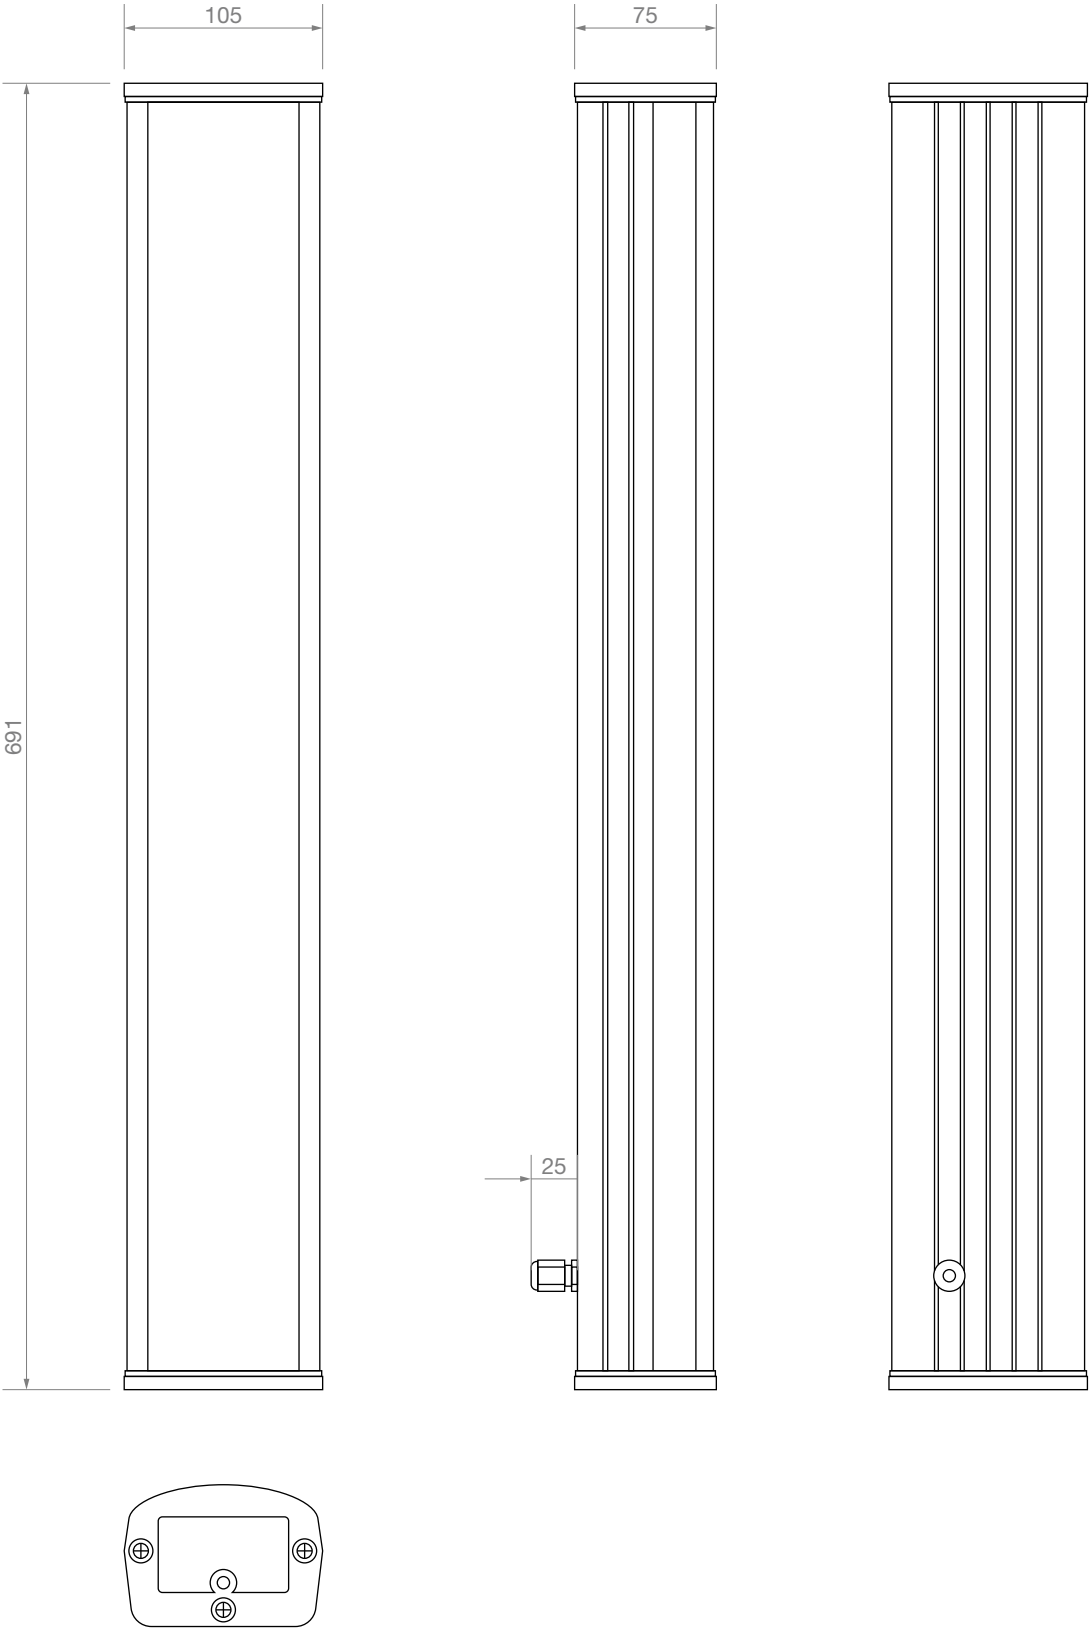

FONESTAR	Model	Description	Units	Scale
	TOWER-40TB	100 V LINE TRANSFORMER SOUND COLUMN.	mm	1:4