

HIGH POWER / MIXERS / STUDIO

MIX-8PRO

STUDIO MIXER.



BLUETOOTH



USB



REC



PC

- ✓ 8 channels and 2 outputs with independent volume controls
- ✓ USB player/recorder
- ✓ 16 digital effects processor
- ✓ USB audio for connection to PC as audio card



+ Info:

<https://fonestar.com/MIX-8PRO>

ESPECIALLY RECOMMENDED IN:



Hospitality



Sports facilities



Education



Hotels

DESCRIPTION

Studio mixer. 8 channels. 2 x outputs with independent volume control. 8 x micro/lines. USB recorder/player and Bluetooth® receiver. USB audio input/output for connection to PC as audio card. 16 digital effects processor.

TECHNICAL CHARACTERISTICS

FEATURES	Professional 8-channel, 2-output mixer with independent volume controls. USB audio input for PC connection as Plug and Play audio card on Windows and Mac, allows audio playback from PC. 4.2 Bluetooth Receiver USB recorder/player. 16 digital effects processor.
USB PLAYER	Playback formats: WAV and MP3 MP3 recording USB port for USB stick connection or PC connection as Plug and Play audio card under Windows and Mac Supports memory up to 128 GB
INPUTS	8 balanced XLR mics, 600 Ohm 2 mV (LED peak, 1 kHz, 20 mV RMS) 8 unbalanced lines, 6.3 mm jack, 47,000 Ohm 45 mV (LED peak, 1 kHz, 180 mV RMS) 2 balanced returns, 2 x 6.3 mm jack, 47,000 Ohm 300 mV RMS
OUTPUTS	1 stereo main (2 x XLR or 2 x 6.3 mm jack), 5 V RMS 1 stereo line, 2 x RCA, 5 V RMS 1 post-fader send, 6.3 mm jack, 5 V RMS 1 stereo headphone, 6.3 mm jack
CONTROLS	Mic/line: low-cut filter (18 dB/octave, 75 Hz), gain, bass (± 15 dB, 80 Hz), mid (± 15 dB, 2,500 Hz), treble (± 15 dB, 12,000 Hz), aux/EFX send, pan, mute and slide volume control USB recorder/player: mode, play/pause/rec, song forward/reverse, bass (± 15 dB, 80 Hz), treble (± 15 dB, 12,000 Hz) and slider volume control Main: sliding volume control Phones: volume control Post-fader aux send: volume control Aux returns: volume control DSP effects processor: effect selection, repeat and slider volume control



+ Info:




<https://fonestar.com/MIX-8PRO>

FUNCTIONS	Sliders per channel 3-band EQ on channels 1 to 8 2-band equaliser on USB recorder/player Overload and master output level indicator lights
PHANTOM	48 V, selectable
RESPONSE	20-20,000 Hz
DISTORTION	Harmonic: 0.07 %
S/N RATIO	> 65 dB
POWER SUPPLY	100-240 V AC, 20 W maximum
DIMENSIONS	390 x 85 x 320 mm depth
WEIGHT	3.7 kg
OPTIONAL	SM-8PRO: mounts for assembly in 19" rack



+ Info:

<https://fonestar.com/MIX-8PRO>

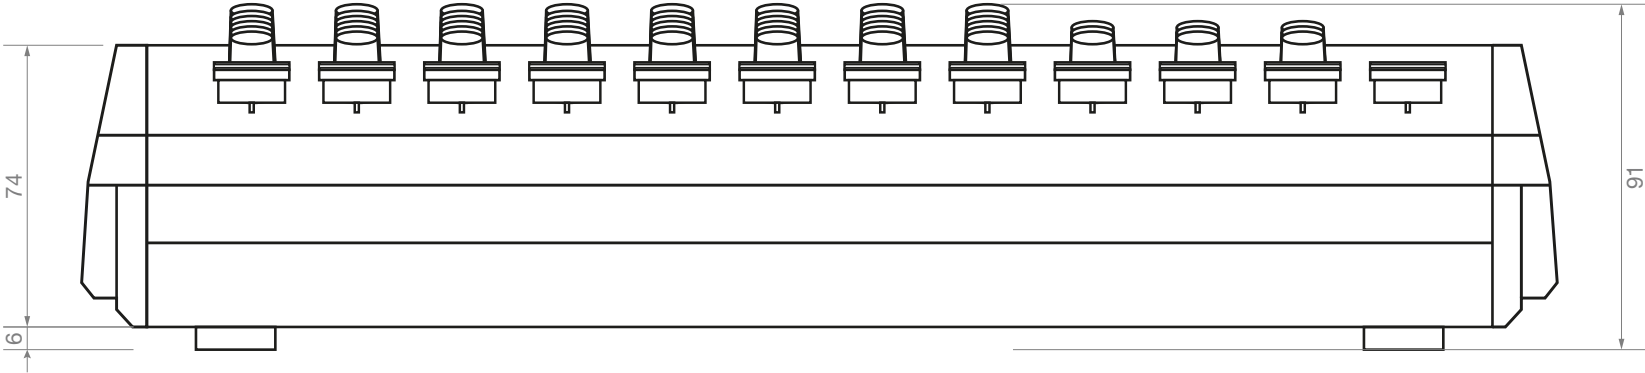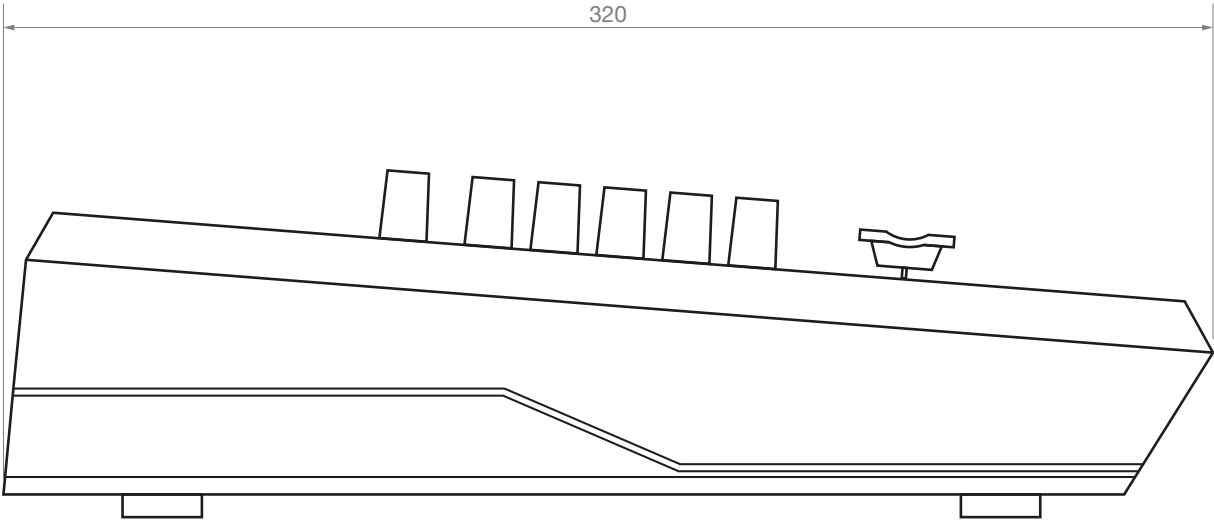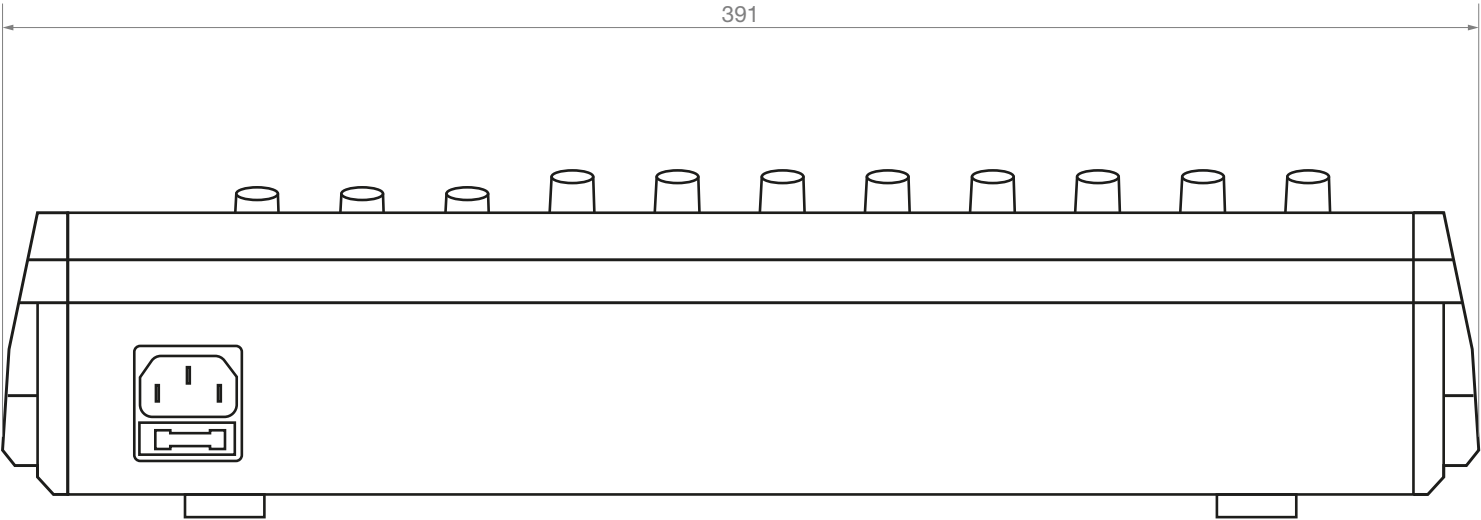

FONESTAR	Model	Description	Units	Scale
	MIX-8PRO	STUDIO MIXER	mm	1:2