MICROPHONE / WIRELESS MICROPHONES / UHF

MSHR-46D-570

UHF TRUE DIVERSITY DUAL RECEIVER







PLL 32 CH
UHF 570-582 MHz

- High intelligibility sound, crisp, distortion-free speech
- 32 UHF channels
- Auto scan function.
- Channel transmission to the microphone via IR.
- Dual receiver

+ Info:
https://fonestar.com/MSHR-46D-570

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION


UHF True Diversity dual receiver. 32 selectable frequencies 570- 582 MHz.


TECHNICAL CHARACTERISTICS


FEATURES	True Diversity UHF double receiver. Auto scan function. Infrared channel to microphone transmission. Detachable antennas. For models MSH-892, MSH-895 and MSH-898.
FREQUENCY	570-582 MHz band 32 channels
INPUTS	2 antennas, TNC female, 50 Ohm. With 8 V DC output for power supply of antenna amplifiers
OUTPUTS	Audio: 2 balanced, XLR, 0 ~ 600 mV, 600 Ohm 2 unbalanced, 6.3 mm jack, 0 ~ 300 mV, 1 KOhm 1 unbalanced line mixed signal, 6.3 mm jack, 0 ~ 300 mV, 1 KOhm
DIMENSIONS	420 x 45 x 187 mm depth
WEIGHT	2.7 kg
POWER SUPPLY	Receiver: 12.8 V DC, 450 mA, with adapter included
ACCESSORIES	Mounts for assembling in 1 U 19" rack 6.3 mm mono jack cable




+ Info:
https://fonestar.com/MSHR-46D-570

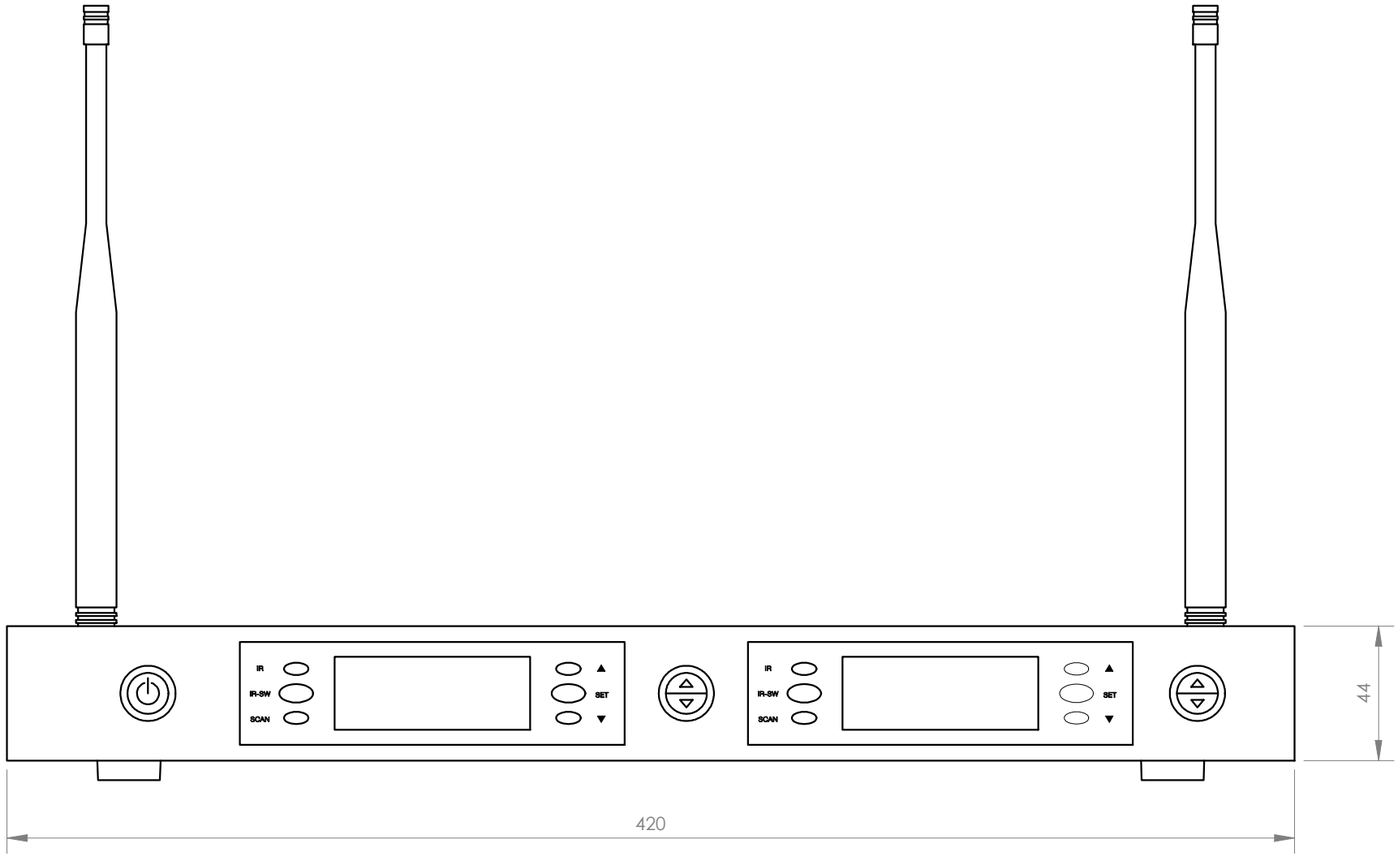

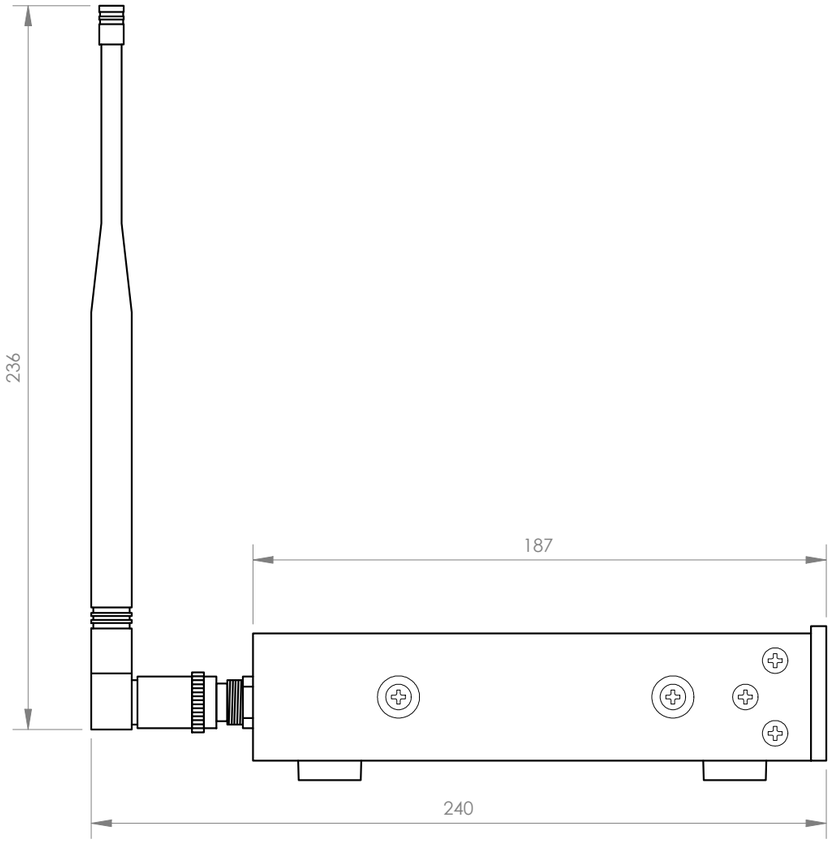

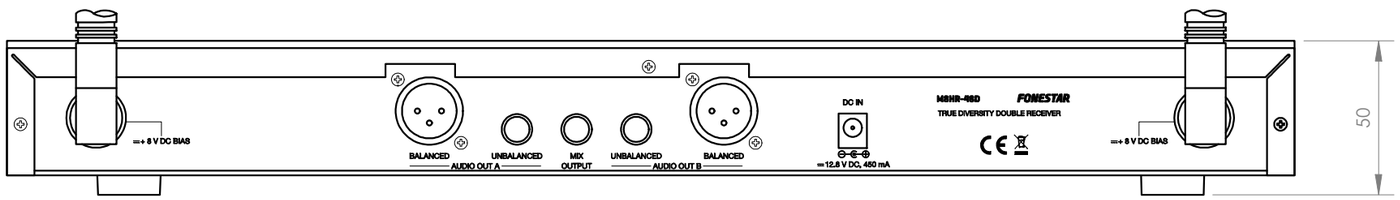

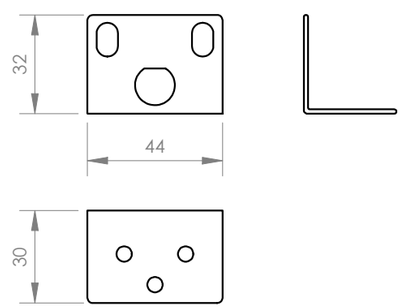

FONESTAR	Model MSHR-46D	Description UHF DOUBLE RECEIVER	Units mm	Scale 1:2