

MICROPHONE / DESKTOP MICROPHONE / DYNAMIC

MICSET-D32JSE

CARDIOID UNIDIRECTIONAL DESKTOP DYNAMIC MICROPHONE


 6.3 mm JACK (UNBALANCED)
CABLE - STRIPPED TERMINAL


32 cm GOOSENECK


 DIVERSE RANGE
MODULAR DESIGN


HIGH SNR



HIGH SPL


 LED
INDICATORS

 MULTIPLE OPERATING
MODES: ON/OFF/PTT

 DYNAMIC
UNIDIRECTIONAL
DYNAMIC

 WIDE FREQUENCY
RESPONSE

- ✓ Crystal clear voice pick-up
- ✓ 6.3 mm mono jack connection and stripped ends for contact closure via push button. Activates priority or musical warning tone.
- ✓ Great max. SPL



+ Info:

<https://fonestar.com/MICSET-D32JSE>

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

Cardioid unidirectional desktop dynamic microphone. 100-15.000 Hz. Sensitivity -55 dB (V/Pa) at 1 kHz. Connection Jack 6,3 mm mono and bare tips for closing contacts

TECHNICAL CHARACTERISTICS


CAPSULE	Unidirectional cardioid dynamics
RESPONSE	100-15,000 Hz
SENSITIVITY	-55 dB $\pm$ 3 dB (V/Pa) at 1 kHz
IMPEDANCE	600 Ohm
MAX SPL	110 dB
EQUIVALENT NOISE	32 dB
DYNAMIC RANGE	78 dB
DISTORTION (THD)	<1 %
SNR	75 dB
PUSH BUTTON	ON-OFF/PTT
TEMPERATURE	Operating temperature: -20 °C - 50 °C Storage temperature: -25 °C - 70 °C Relative humidity: 0 - 90 %
CONNECTORS	6.3 mm mono jack connection and stripped ends for contact closure
DIMENSIONS	Gooseneck: 32 cm high Desktop base: 93 x 46 x 122 mm depth
CABLE	1.5 m with 6.3 mm mono jack plug and stripped ends Unbalanced line
WEIGHT	0.62 kg



+ Info:

<https://fonestar.com/MICSET-D32JSE>

1kHz

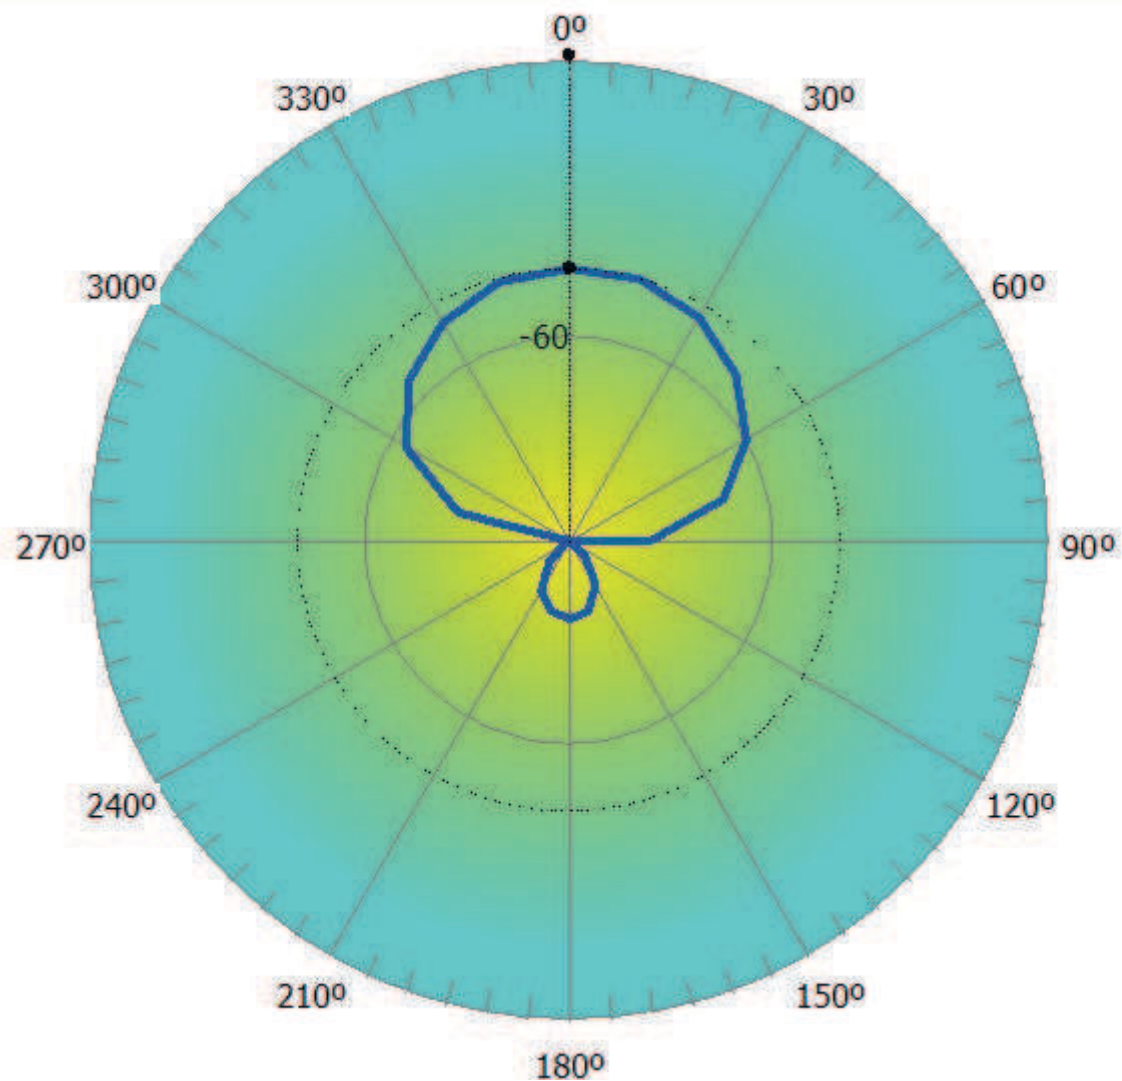

Frequency : 1kHz
Magnitude : -55.042 dB/1 V
Angle : 0 Deg.

Product:
MICSET-D32XLR + MICSET-D32J + MICSET-D32JSE
Polar Diagram

Date: 2025-01-09

FONESTAR
www.fonestar.es