MICROPHONE / WIRELESS MICROPHONES / UHF

MSH-895-512

2 CHANNEL UHF WIRELESS MICROPHONE SYSTEM



PLL 32 CH
UHF 512-525 MHz

- High intelligibility sound, crisp, distortion-free speech
- 32 UHF channels
- Auto scan function.
- Channel transmission to the microphone via IR.
- 2 hand-held microphones

+ Info:
https://fonestar.com/MSH-895-512

ESPECIALLY RECOMMENDED IN:



All sectors

DESCRIPTION

UHF wireless system. True diversity. 2 channels. 2 hand-held microphone. 32 selectable frequencies.


TECHNICAL CHARACTERISTICS


FEATURES	True diversity double receiver with 2 wireless hand-held microphones with unidirectional electret condenser capsule. Auto scan function. IR channel to microphone transmission. Detachable antennas. With multiple receivers, maximum 4 - 5 microphones at the same time. For more microphones use other frequency bands.
FREQUENCIES	Band 512-525 MHz 32 channels
POWER	10 mW maximum
RESPONSE	40-18,000 Hz
S/N RATIO	> 105 dB
INPUTS	2 antennas, TNC female, 50 Ohm. With 8 V DC output for power supply of antenna amplifiers
OUTPUTS	Audio: 2 balanced, XLR, 0 ~ 600 mV, 600 Ohm 2 unbalanced, 6.3 mm jack, 0 ~ 300 mV, 1KOhm 1 unbalanced line mixed signal, 6.3 mm jack, 0 ~ 300 mV, 1KOhm
MICROPHONES	2 wireless hand-held microphones with unidirectional electret condenser capsule
DIMENSIONS	Receiver: 420 x 45 x 187 mm depth
WEIGHT	3.48 kg
POWER SUPPLY	Receiver: 12.8 V DC, 450 mA, with adapter included Transmitter microphone: 2 LR6-AA batteries. Accepts rechargeable batteries
ACCESSORIES	Mounts for assembling in 1 U 19" rack 2 x 6.3 mm mono jack cable Rechargeable batteries
OPTIONAL	MSC-2 and MSC-12: wireless microphone recharge docking stations




+ Info:
https://fonestar.com/MSH-895-512


MSHR-46D

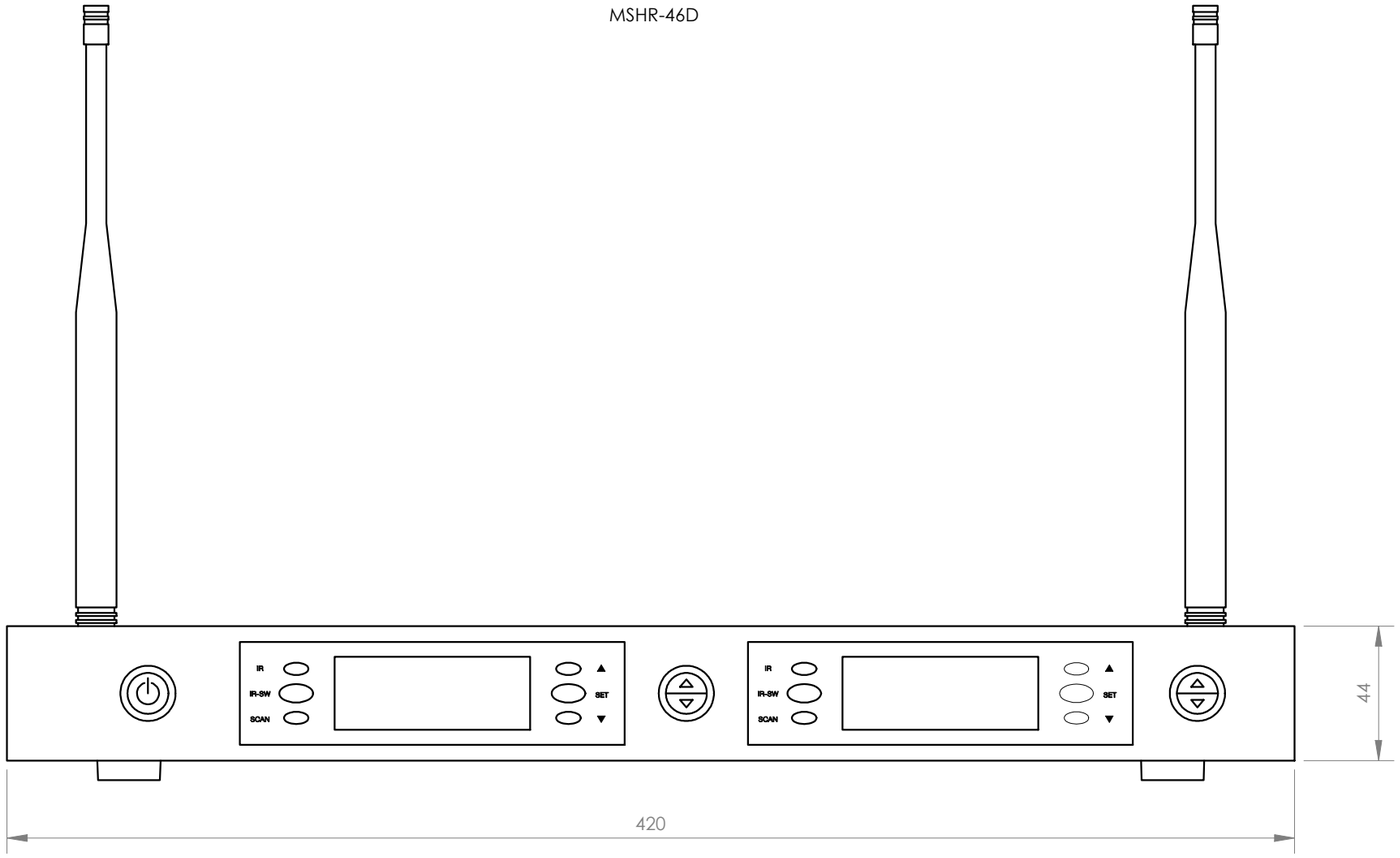


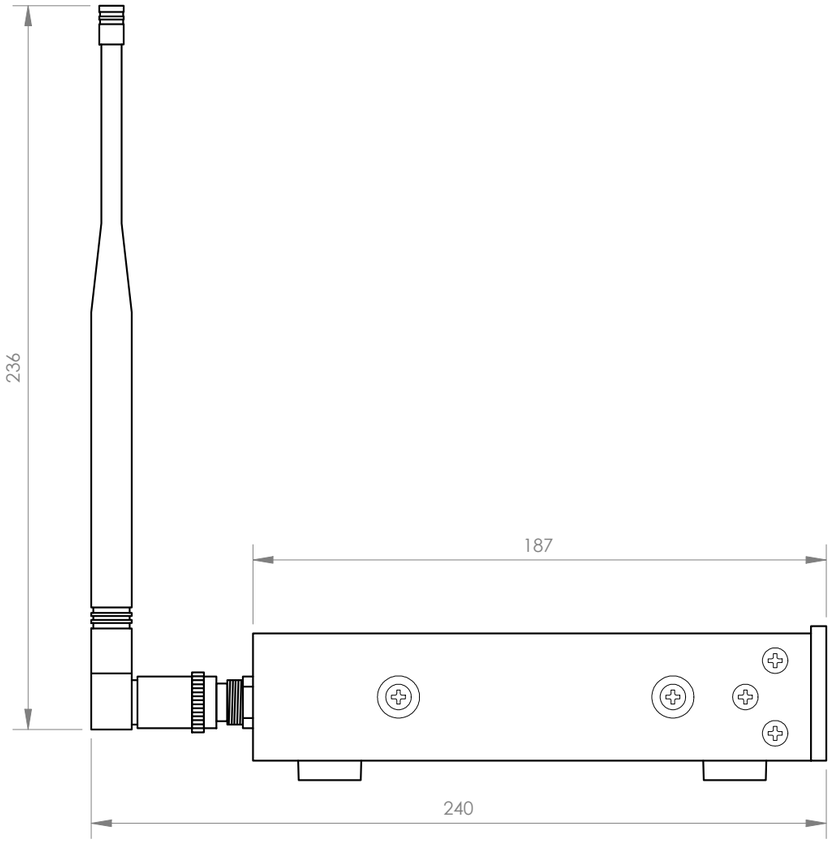

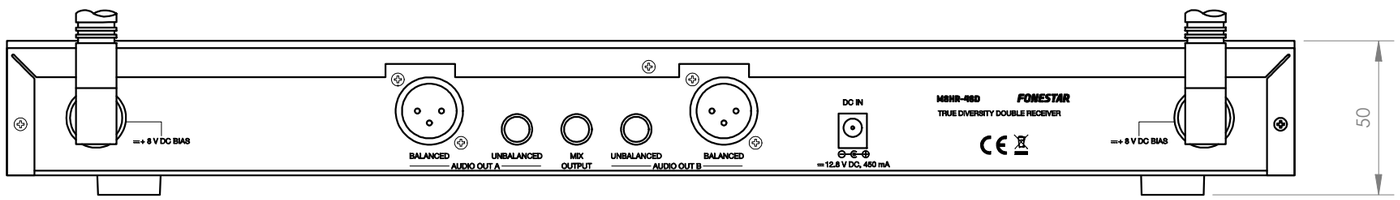

MSHT-40M

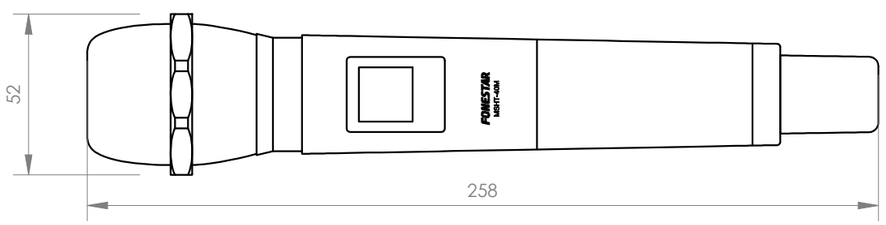

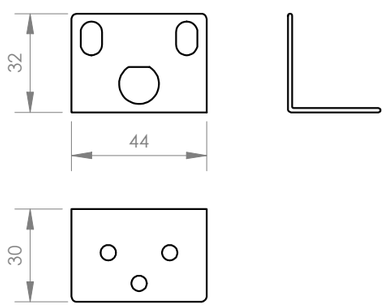

FONESTAR	Model	Description	Units	Scale
	MSH-895	DOUBLE UHF HAND-HELD WIRELESS MICROPHONE	mm	1:2